




PROFORCE V2 HYBRID

Model	Recommended Driver Swing Speed														
	60	65	70	75	80	85	90	95	100	105	110	115	120	125	130
PF V2 Hybrid .335, .350			A		R		S		X						
PF V2 Hybrid .370			A		R		S		X						
PF V2 HL Hybrid .370			A		R		S		X						
PF V2 Hybrid Tour 84					R		S		X						
PF V2 Hybrid 104							S		X						

Wood Tip Trimming Recommendations				
Model	Driver	3 Wood	5 Wood	7 Wood
PF V2 Hybrid .335 - 8200	N/A	0"	1"	2"
PF V2 Hybrid .350 - 8260	N/A	0"	1"	2"

Hybrid Tip Trimming Recommendations					
Model	#1 Replacement	#2 Replacement	#3 Replacement	#4 Replacement	#5 Replacement
PF V2 Hybrid .335 - 8200	0"	.5"	1"	1.5"	2.0"
PF V2 Hybrid .350 - 8260					
PF V2 Hybrid .370 - 820					
PF V2 HL Hybrid .370 - 825					
PF V2 Hybrid Tour 84 - 855					
PF V2 Hybrid Tour 104 - 870					

8200/8260 - Proforce V2 Hybrid .335 & .350													
SwingWt.	C5	C6	C7	C8	C9	D0	D1	D2	D3	D4	D5	D6	
38.5 in	236	238	240	242	244	246	248	250	252	254	256	258	
39.0 in	232	234	236	238	240	242	244	246	248	250	252	254	
39.5 in	228	230	232	234	236	238	240	242	244	246	248	250	
40.0 in	224	226	228	230	232	234	236	238	240	242	244	246	
40.5 in	220	222	224	226	228	230	232	234	236	238	240	242	
41.0 in	216	218	220	222	224	226	228	230	232	234	236	238	
41.5 in	212	214	216	218	220	222	224	226	228	230	232	234	
42.0 in	208	210	212	214	216	218	220	222	224	226	228	230	
42.5 in	204	206	208	210	212	214	216	218	220	222	224	226	
43.0 in		202	204	206	208	210	212	214	216	218	220	222	
43.5 in					204	206	208	210	212	214	216	218	
44.0 in							204	206	208	210	212	214	

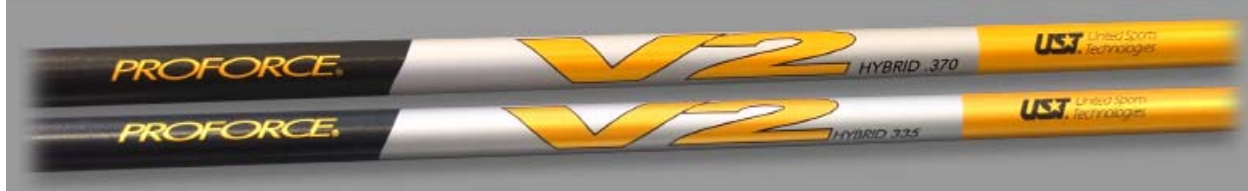

PROFORCE V2 HYBRID

820 - Proforce V2 Hybrid .370
 825 - Proforce V2 HL Hybrid .370
 855 - Proforce V2 Tour Hybrid 84

SwingWt.	C5	C6	C7	C8	C9	D0	D1	D2	D3	D4	D5	D6
36.5 in	252	254	256	258	260	262	264	266	268	270	272	274
37.0 in	248	250	252	254	256	258	260	262	264	266	268	270
37.5 in	244	246	248	250	252	254	256	258	260	262	264	266
38.0 in	240	242	244	246	248	250	252	254	256	258	260	262
38.5 in	236	238	240	242	244	246	248	250	252	254	256	258
39.0 in	232	234	236	238	240	242	244	246	248	250	252	254
39.5 in	228	230	232	234	236	238	240	242	244	246	248	250
40.0 in	224	226	228	230	232	234	236	238	240	242	244	246
40.5 in	220	222	224	226	228	230	232	234	236	238	240	242
41.0 in		218	220	222	224	226	228	230	232	234	236	238
41.5 in					220	222	224	226	228	230	232	234
42.0 in							220	222	224	226	228	230

Proforce V2 Tour Hybrid 104

SwingWt.	C5	C6	C7	C8	C9	D0	D1	D2	D3	D4	D5	D6
Length - 37.5 in	250	252	254	256	258	260	262	264	266	268	270	272
38.0 in	246	248	250	252	254	256	258	260	262	264	266	268
38.5 in	242	244	246	248	250	252	254	256	258	260	262	264
39.0 in	238	240	242	244	246	248	250	252	254	256	258	260
39.5 in	234	236	238	240	242	244	246	248	250	252	254	256
40.0 in	230	232	234	236	238	240	242	244	246	248	250	252
40.5 in	226	228	230	232	234	236	238	240	242	244	246	248
41.0 in	222	224	226	228	230	232	234	236	238	240	242	244
41.5 in	218	220	222	224	226	228	230	232	234	236	238	240
42.0 in		216	218	220	222	224	226	228	230	232	234	236
42.5 in					218	220	222	224	226	228	230	232
43.0 in							218	220	222	224	226	228