




## PROFORCE V2 WOODS

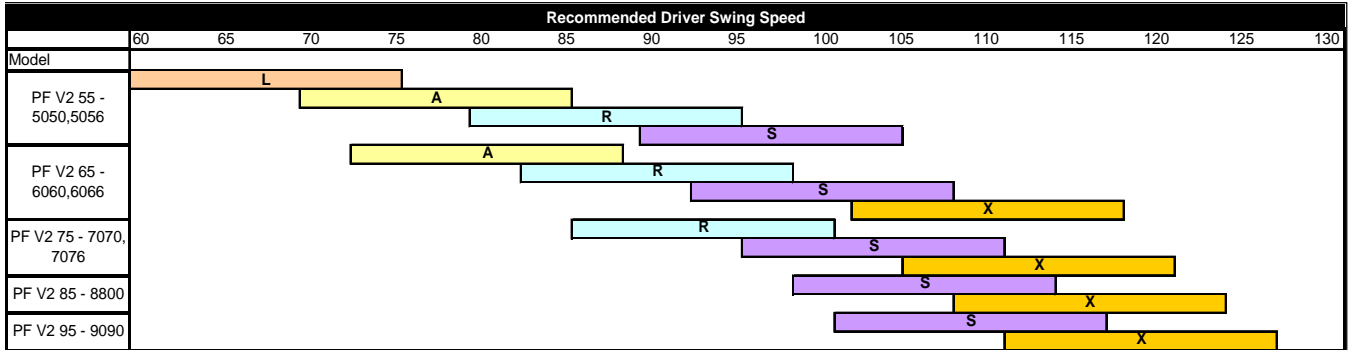

Wood Tip Trimming Recommendations				
Model	Driver	3 Wood	5 Wood	7 Wood
PF V2 55 - 5050,5056	0"	1"	2"	2"
PF V2 65 - 6060,6066				
PF V2 75 - 7070, 7076				
PF V2 85 - 8800				
PF V2 95 - 9090				

Hybrid Tip Trimming Recommendations				
Model	#1 Replacement	#2 Replacement	#3 Replacement	#4 Replacement
PF V2 55 - 5050,5056	1"	1.5"	2"	2.5"
PF V2 65 - 6060,6066				
PF V2 75 - 7070, 7076				
PF V2 85 - 8800				
PF V2 95 - 9090				

5050/5056 - Proforce V2 55												
SwingWt.	C5	C6	C7	C8	C9	D0	D1	D2	D3	D4	D5	D6
40.5 in	224	226	228	230	232	234	236	238	240	242	244	246
41 in	220	222	224	226	228	230	232	234	236	238	240	242
41.5 in	216	218	220	222	224	226	228	230	232	234	236	238
42 in	212	214	216	218	220	222	224	226	228	230	232	234
42.5 in	208	210	212	214	216	218	220	222	224	226	228	230
43 in	204	206	208	210	212	214	216	218	220	222	224	226
43.5 in	200	202	204	206	208	210	212	214	216	218	220	222
44.0 in	196	198	200	202	204	206	208	210	212	214	216	218
44.5 in	192	194	196	198	200	202	204	206	208	210	212	214
45.0 in		190	192	194	196	198	200	202	204	206	208	210
45.5 in					192	194	196	198	200	202	204	206
46.0 in							192	194	196	198	200	202

6060/6066 - Proforce V2 65												
SwingWt.	C5	C6	C7	C8	C9	D0	D1	D2	D3	D4	D5	D6
40.5 in	222	224	226	228	230	232	234	236	238	240	242	244
41 in	218	220	222	224	226	228	230	232	234	236	238	240
41.5 in	214	216	218	220	222	224	226	228	230	232	234	236
42 in	210	212	214	216	218	220	222	224	226	228	230	232
42.5 in	206	208	210	212	214	216	218	220	222	224	226	228
43 in	202	204	206	208	210	212	214	216	218	220	222	224
43.5 in	198	200	202	204	206	208	210	212	214	216	218	220
44.0 in	194	196	198	200	202	204	206	208	210	212	214	216
44.5 in	190	192	194	196	198	200	202	204	206	208	210	212
45.0 in		188	190	192	194	196	198	200	202	204	206	208
45.5 in					190	192	194	196	198	200	202	204
46.0 in							190	192	194	196	198	200



## PROFORCE V2 WOODS

7070/7076 - Proforce V2 75

SwingWt.	C5	C6	C7	C8	C9	D0	D1	D2	D3	D4	D5	D6
40.5 in	220	222	224	226	228	230	232	234	236	238	240	242
41 in	216	218	220	222	224	226	228	230	232	234	236	238
41.5 in	212	214	216	218	220	222	224	226	228	230	232	234
42 in	208	210	212	214	216	218	220	222	224	226	228	230
42.5 in	204	206	208	210	212	214	216	218	220	222	224	226
43 in	200	202	204	206	208	210	212	214	216	218	220	222
43.5 in	196	198	200	202	204	206	208	210	212	214	216	218
44.0 in	192	194	196	198	200	202	204	206	208	210	212	214
44.5 in	188	190	192	194	196	198	200	202	204	206	208	210
45.0 in		186	188	190	192	194	196	198	200	202	204	206
45.5 in					188	190	192	194	196	198	200	202
46.0 in							188	190	192	194	196	198

8800 - Proforce V2 85

SwingWt.	C5	C6	C7	C8	C9	D0	D1	D2	D3	D4	D5	D6
40.5 in	218	220	222	224	226	228	230	232	234	236	238	240
41 in	214	216	218	220	222	224	226	228	230	232	234	236
41.5 in	210	212	214	216	218	220	222	224	226	228	230	232
42 in	206	208	210	212	214	216	218	220	222	224	226	228
42.5 in	202	204	206	208	210	212	214	216	218	220	222	224
43 in	198	200	202	204	206	208	210	212	214	216	218	220
43.5 in	194	196	198	200	202	204	206	208	210	212	214	216
44.0 in	190	192	194	196	198	200	202	204	206	208	210	212
44.5 in	186	188	190	192	194	196	198	200	202	204	206	208
45.0 in		184	186	188	190	192	194	196	198	200	202	204
45.5 in					186	188	190	192	194	196	198	200
46.0 in							186	188	190	192	194	196

9090 - Proforce V2 95

SwingWt.	C5	C6	C7	C8	C9	D0	D1	D2	D3	D4	D5	D6
40.5 in	216	218	220	222	224	226	228	230	232	234	236	238
41 in	212	214	216	218	220	222	224	226	228	230	232	234
41.5 in	208	210	212	214	216	218	220	222	224	226	228	230
42 in	204	206	208	210	212	214	216	218	220	222	224	226
42.5 in	200	202	204	206	208	210	212	214	216	218	220	222
43 in	196	198	200	202	204	206	208	210	212	214	216	218
43.5 in	192	194	196	198	200	202	204	206	208	210	212	214
44.0 in	188	190	192	194	196	198	200	202	204	206	208	210
44.5 in	184	186	188	190	192	194	196	198	200	202	204	206
45.0 in		182	184	186	188	190	192	194	196	198	200	202
45.5 in					184	186	188	190	192	194	196	198
46.0 in							184	186	188	190	192	194